


AR 847


v. 2011-06-22-MIT-DVB

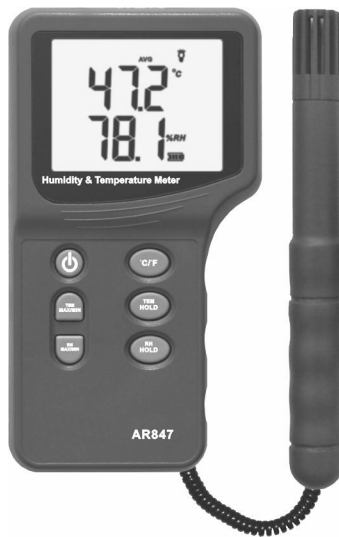

§
§
§
§
§
§
§
§

(MAX/MIN) / (HOLD) (°C/°F)
()
-20...+1000°

	-10...+50°C; -20...+1000°
	5,0...98%RH
:	±1°C (± 1,8°F); ±3% ± 2° ; ±3,5%RH
	0,1°C (0,1°F); 1°C . ; 0,1 % RH
	2,5
	9
:	-10...+50 °C (32...122 °F) ≤ 80%RH
	-10...+50 °C (32...122 °F), 0...90%RH

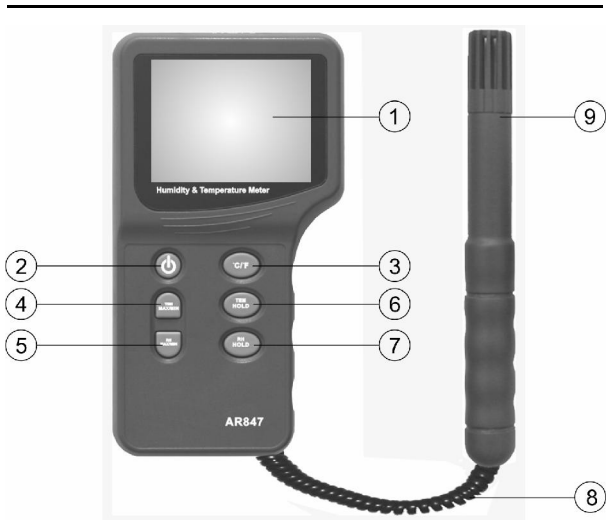

. 1

- 1 -
- 2 -
- 3 -
- 4 -
- 5 -
- 6 -
- 7 -
- 8 -
- 9 -

/
 °C/°F
 /
(TEM MAX/MIN)
 /
(RH MAX/MIN)
(TEM HOLD)
(RH HOLD)

- 1)
- 2)
- 3)

9
 (. 2 .1).
): °C/°F, (
 ().
 /
TEM MAX/MIN , :
 , , .

4) / :
RH MAX/MIN

5) :
TEM HOLD RH HOLD

6) : ()
«TYPE K»

7) : 2 °C/°F

8) ,

9) 10 .



12



: _____